



FGA-2500

The latest Palm & fingerprint recognition system

Highly secure with advanced access control function

Features


- 1,000 Palms, 5,000 Fingerprint and 200,000 Logs records
- Latest BioID anti fake fingerprint sensor
- Advance access control function include lock connection, alarm, Wiegand input and output
- Build-in Li-battery 3.7V 4000 mAh
- Multiple communication of TCP/IP, USB
- empeo certified



BioID FP sensor



Palm
Verification



Work code




empeo certified




Anti-passback



Schedule bell



Battery

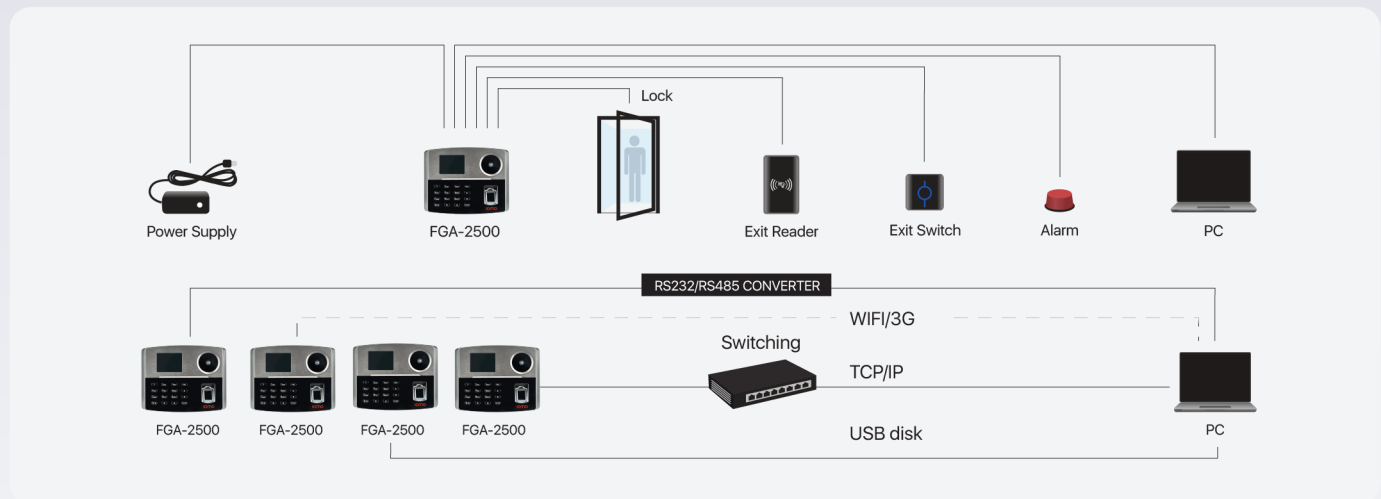

Specification

Model	FGA-2500
Fingerprint reader	BioID fingerprint sensor
Display	LCD Display 3" TFT color screen
Speaker	Voice prompt
Capacity	Fingerprint: 5,000 Palms capacity: 1,000 Logs: 200,000
Verification	Verification speed (1:1) ≤ 0.5S Identification speed (1:N) ≤ 1S
Identification	FRR ≤ 0.01% FAR ≤ 0.0001%
Communications	TCP/IP, USB Host, RS232/485, Wiegand in/out
Attendance status	Check in/out, Break in/out, Overtime in/out
Access Control	Built-in relay, EM lock, door sensor, exit button, etc
Alarm	Dismantlement alarm, break-in alarm, duress alarm
Language	Multi language, English, French, Spanish, Arabic, etc.
Power Supply	110/220 VAC-12VDC/3A, Built-in Li-battery 3.7V 4000mAh
Environment	Operation temperature: 0°C-45°C Operation humidity: 20%-80%
Dimension	Machine size: 200(L)*153(W)*44(H)mm
Function support	Workcode, DST, Auto-Status, T9 input, 9 PIN user ID, Webserver, Scheduled-bell, SMS, Self-service Query, Photo ID, Anti-passback, ADMS, External Siren

Package List

Device	Mounted plate	Screws	Connection Cable	Power adapter	Li-Battery